


# 4MB-4AM


(BASE-COUPLING MOUNT TYPE)

# 4AM


(PUMPHEAD)

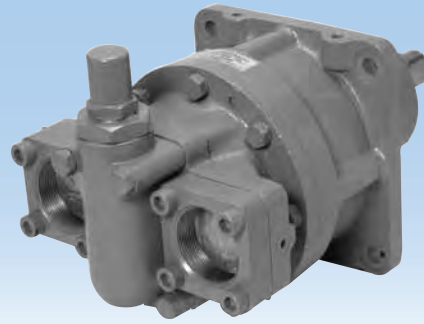

## Model Numbering System (For General Lubricant Oil)

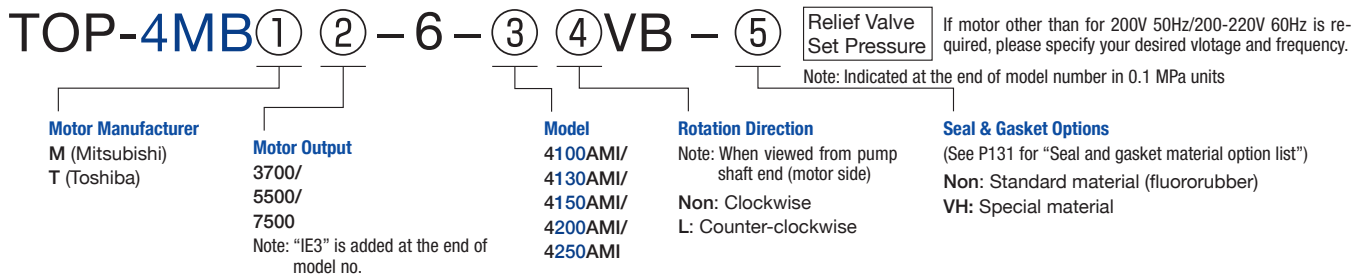

## Model Numbering System (Pumphead)

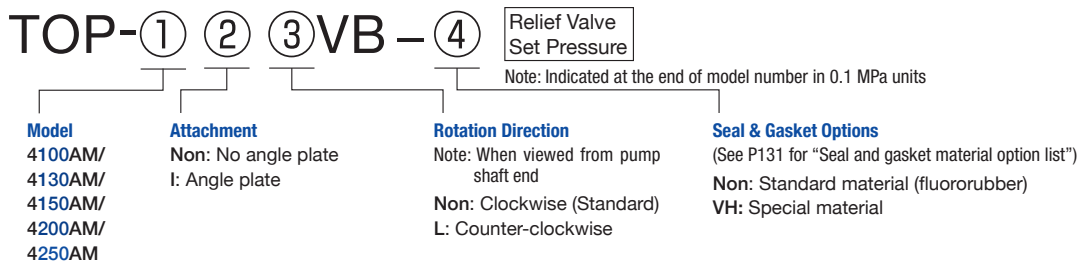

## Specifications

Model	Item	Theoretical displacement (cm <sup>3</sup> /rev)	Max. pressure (MPa)	Max. revolution (min <sup>-1</sup> )	Approx. Weight (Kg)
TOP-4100AM		115.5	2.0	1800	28.0
TOP-4130AM		148.5	2.0	1800	30.0
TOP-4150AM		171.6	2.0	1500	31.0
TOP-4200AM		231.0	2.0	1500	34.0
TOP-4250AM		280.5	2.0	1200	42.0

- Test oil: ISO-VG2/Oil temperature: 40C
- Add 9 Kg to the total weight if angle plate option is selected.

## Specifications

Model	Item	Motor speed 50Hz 1000min <sup>-1</sup>			Theoretical discharge (ℓ/min)	Motor speed 60Hz 1200min <sup>-1</sup>				
		Theoretical discharge (ℓ/min)	Max. pressure for motor output (MPa)			Theoretical discharge (ℓ/min)	Max. pressure for motor output (MPa)			
			3700W	5500W			7500W	3700W	5500W	7500W
TOP-4100AM		115.5	1.1	2.0	2.0	138.6	0.8	1.5	2.0	
TOP-4130AM		148.5	0.8	1.5	2.0	178.2	0.6	1.1	1.6	
TOP-4150AM		171.6	0.7	1.3	1.4	205.9	0.4	0.9	1.2	
TOP-4200AM		231.0	0.4	0.8	1.1	277.2	0.2	0.6	0.7	
TOP-4250AM		280.5	-	0.6	0.9	336.6	-	0.4	0.6	

- Test oil: ISO-VG46/Oil temperature: 40C
- Number of poles : 6P

Any disassembly or alteration of the product will void the warranty.